


CS6

BY WESTERN LIGHTING

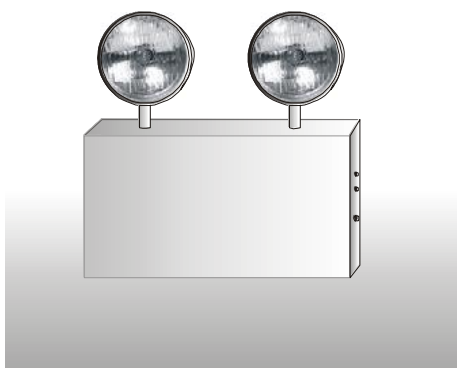

6 VOLT WALL MOUNTED EMERGENCY LIGHTING UNIT STEEL CASE, STEEL HEADS

SPECIFICATIONS

HOUSING:	Compact size white painted 20-gauge steel, is easily mounted. Access to test switch and LED charge/AC indicator lamp are on the side.	LAMPS:	2 - 12 watt Halogen lamps with glass lens are standard.
BATTERY:	Standard is 6 volt 12 AH maintenance free sealed lead calcium cell. 90 minute operation.	OPTIONS:	Battery Heater and thermostat For Cold-Weather applications Activates at +50deg F "-HTR" Wired for one remote mounted heads "-1R" . Wired for two remote mounted heads "-2R" For remote test by a hand held transmitter specify "-RT" Wire guard "-WG" Black housing & heads "-BLK"
HEADS:	Two metal heads top mount "-2H" (standard). Two metal heads, side mount "2SM" One metal head specify "-1H" No heads "-0H"	CODES:	ETL listed. Complies with NEC and Life Safety Code. Meets City of Chicago requirements.
CHARGER:	Solid-state 6 volts DC design meets UL 924 recharge requirements, low voltage disconnect protects against deep discharge, line latch circuit included. Brown out protected.	DIMENSIONS:	Width (housing) 9" Depth 2-3/4" Height with top mount heads 13" Height with side mount heads 5" Width with side mount heads 22-3/4"

ORDERING CODE

SERIES	BATTERY		HEADS	OPTIONS
CS6	+	+		+
			0H 1H 2H 2SM	HTR 1R 2R RT WG



WESTERN LIGHTING, INC.
 2349 N. 17th Ave. • Franklin Park, IL 60131-3432
 (847) 451-7200 • Fax: (847) 451-7275

