


VNDL-EM

BY WESTERN LIGHTING

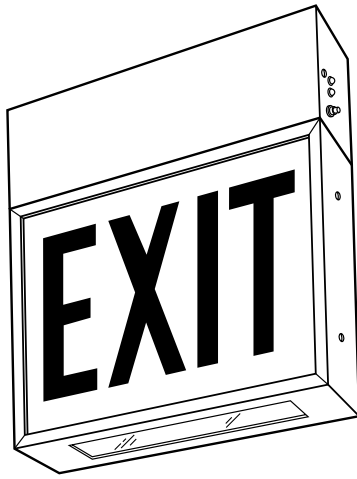

**VANDAL RESISTANT
14 GAUGE DIRECTIONAL AND
EXIT SIGN
BATTERY BACK-UP
2 HOUR RATED
LED, FLUORESCENT,
INCANDESCENT**

SPECIFICATIONS

HOUSING: 14 GA single-face, or double faced with removable end access panel fastened with two stainless steel spanner head tamper proof screws. Easy access test switch and pilot lamp are on the side. Interior wire way is made of 20 GA steel, painted after fabrication.

INSCRIPTION: Full 6" high x 3/4" stroke letters and arrows on phosphorescent background comply with the latest UL 924 size and spacing requirements. Red letters on white "-R/W"
Green letters on white "-G/W"
For special inscriptions and graphics "-SG", consult factory.

LAMPS: 4.1 WATT WHITE LED "-LED"
For two 7 watt compact fluorescent specify "-PL7".
For two 20T6 1/2/DC/IF specify "-LL".
For battery operation two #909 6 volt DC lamps are included.

VOLTAGE: Fluorescent 120 or 277, incandescent 120 volt

FINISH: White powder coat finish standard "-WH".
Black "-BL" or medium bronze "-MB" available on special order. Consult factory for availability.

MOUNTING: Knockouts are provided on top, side and back.

OPERATION: Unit operates as a self contained emergency system. Battery and charger are contained in unit above the sign and meets UL 924 recharge requirements. Battery is lead calcium and sized to operate for a full two hours. Pilot light and test switch are included on the side of the unit.

OPTIONS: Standard panel is 1/4" tempered glass "-GLS"
For polycarbonate panel lens 1/4" thick "-PC"
For canopy kit specify "-CPY".
For wire guard specify "-WG"

CODES: Complies with UL 924, NEC and NFPA-101 Life Safety Code. Meets the Municipal Code of Chicago and approved by the Chicago Bureau of Fire Prevention.
ETL Listed.

DIMENSIONS:

Height 13 1/2"
Width 12 1/4"
Depth 3 1/8"
For canopy, add 1/2"

ORDERING CODE

SERIES	LAMPS	VOLTAGE	FINISH	OPTIONS
VNDL-EM	+	+	+	+
	(*CODE)-R/W (*CODE)-G/W (*CODE)-S/G * SEE BELOW	LED PL-7 LL	120 277	WH BL MB CPY GLS PC WG


	<u>SINGLE FACE EXIT</u>	<u>DOUBLE FACE EXIT</u>	<u>SINGLE FACE STAIRS</u>	<u>DOUBLE FACE STAIRS</u>
NO ARROWS	3	18	2A	17A
ARROW RIGHT	6	21	5A	20A
ARROW LEFT	9	21	8A	20A
DOUBLE ARROW	12	24	11A	23A



WESTERN LIGHTING, INC.
2349 N. 17th Ave. • Franklin Park, IL 60131-3432
(847) 451-7200 • Fax: (847) 451-7275



2010 WESTERN LIGHTING INC
VNDL-LED-EM-2010-3

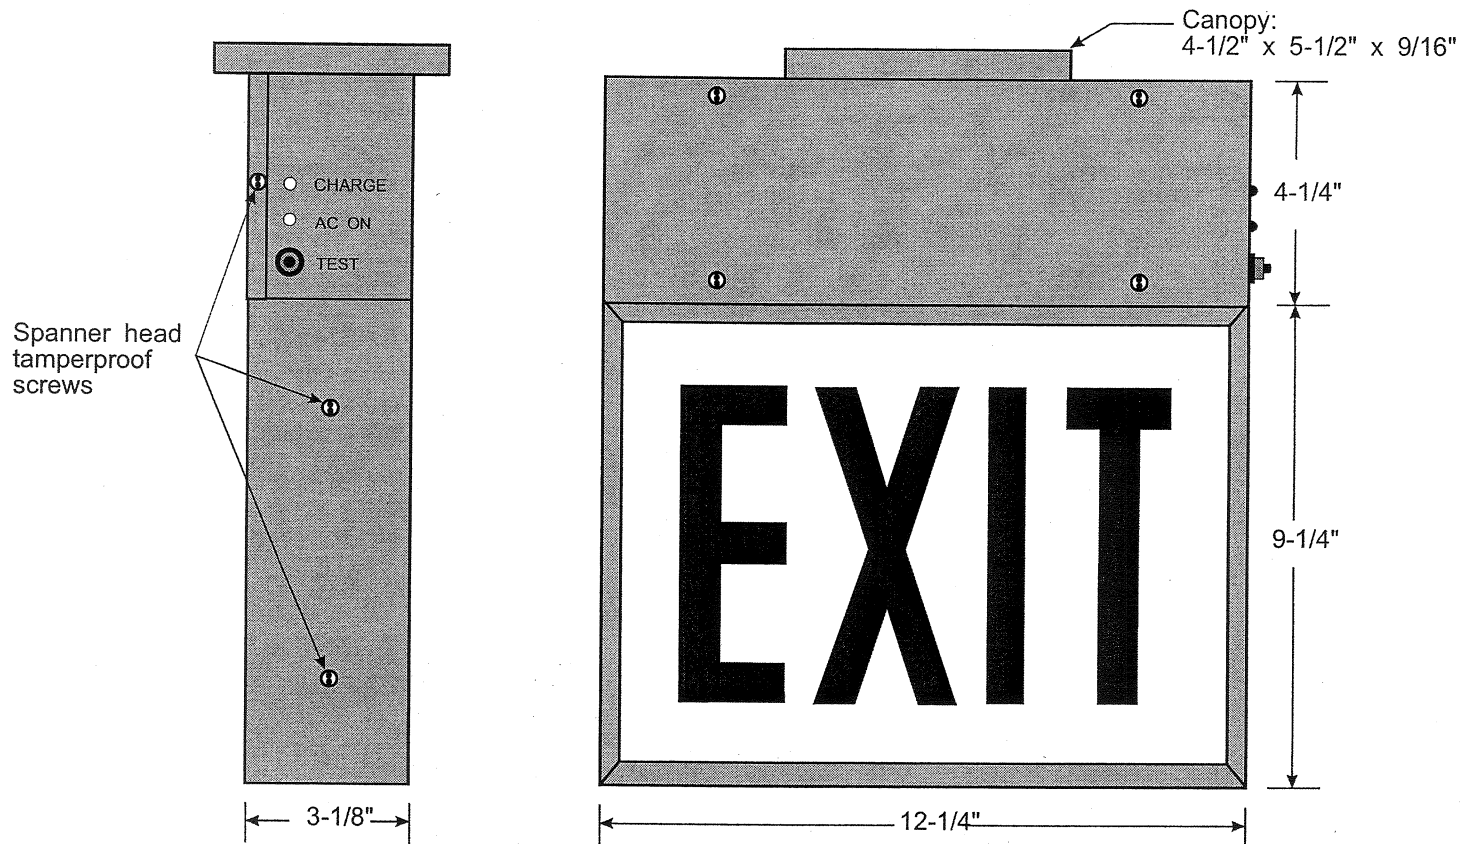

Drawing #: VNDLEM2.0	Date: 9-27-94	Revised:	Scale: NTS
-------------------------	------------------	----------	---------------

VNDL-EM Exit Fixture
Dimensions



WESTERN LIGHTING, INC.
2349 N. 17th Ave. Franklin Park, IL 60131
(847)451-7200 • Fax (847)451-7275

